

EXTRAORAL SUCTION

Ref. 100347



EXTRAORAL SUCTION SYSTEM


Position the mouthpiece next to the patient's mouth and avoid the spread of all types of aerosols, particles in suspension, vapors and odors in the clinic.

Greatly reduce the risk of cross contamination between professionals and patients and protect respiratory health.



Touch screen.


Characteristics

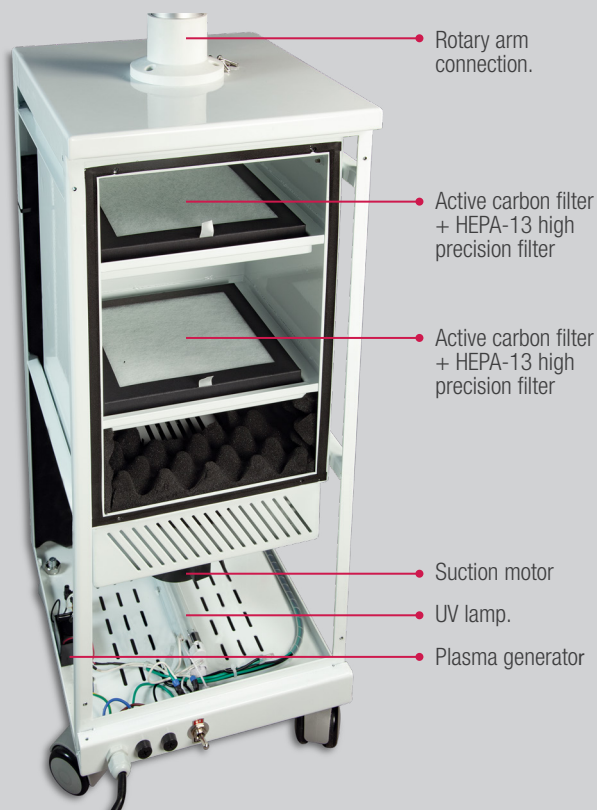

- ✓ Rotary arm connection.
- ✓ Active carbon filter + HEPA-13 high precision filter
- ✓ Active carbon filter + HEPA-13 high precision filter
- ✓ Suction motor
- ✓ UV lamp.
- ✓ Plasma generator
- ✓ Two power levels.
- ✓ 2 filter cartridges composed of:
 - Coarse filter for small particles.
 - Active carbon filter
 - HEPA-13 filter
- ✓ Active carbon filter. HEPA H13 filter.
- ✓ UV light.
- ✓ Plasma generator.
- ✓ Ergonomic shape and easy to move to have a good working position.
- ✓ Semi-rigid suction arm, self-supporting and easy to clean.
- ✓ Easy cleaning housing.
- ✓ Hours of use counter. *

Technical characteristics

- ✓ Two power levels (50-100%).
- ✓ Noise: ≤60 dB.
- ✓ Flow: 4000 L / min.
- ✓ Maximum vacuum: -25 kPa.
- ✓ UV lamp: 254 nm (approximate life 10000 h).
- ✓ Plasma generator: 5000 V (plasma 20000 h).
- ✓ Hepa grade: H13 (0.3 µm, > 99.97%).
- ✓ More than 12 h. continuous work without overheating.

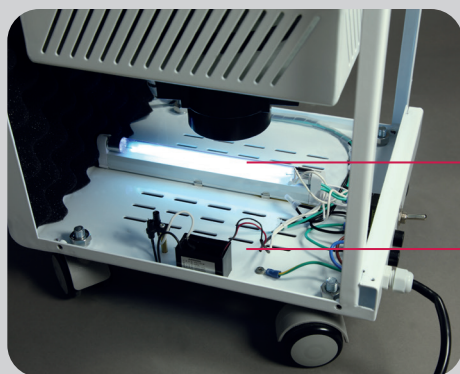

- ✓ UV lamp
- ✓ Plasma generator


Specifications:

Height (arm not included) 755 mm • Width 330 mm

Depth 320 mm • Power supply 220 V, 50/60 Hz.

Consumption 1000 W • Arm length 1,3 m

Weight (arm included) 30kg

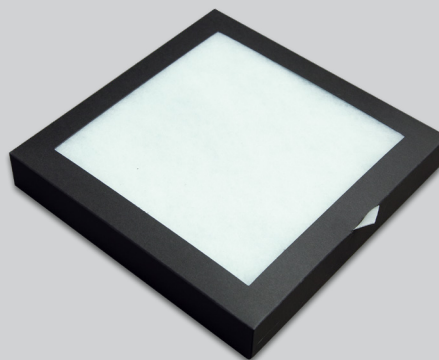

* Observation for maintenance:
It is recommended to replace the filter element after one year of use.



MESTRA

Talleres Mestraitua SL
(+34) 944 530 388
info@mestra.es - www.mestra.es
48150 SONDIKA (Spain)



Management System
ISO 9001:2015

www.tuv.com
ID 1100018003